



Инверторы прямой синус серии S150

Технические характеристики



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41


Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93



Features :






- True sine wave output (THD<5%)
- Power ON-OFF switch
- Power ON-OFF remote control
- Input voltage range: -15% ~ +25%
- Output voltage regulation:±5%
- Thermo control cooling fan
- Two-color indicators display power and fault status
- Protections: Bat. Low alarm/Bat. Low shutdown/Over voltage/Over temp./Output short/Input polarity reverse/Over load.
- Topology: Microprocessor
- Approvals: UL / e13 / FCC / CE
- 2 years warranty



SPECIFICATION


ORDER NO.	S150-112B2	S150-124B2	S150-212F3	S150-224F3
OUTPUT	SAFETY MODEL NO.	S150-112	S150-124	S150-212
	AC VOLTAGE	110V	230V	
	RATED POWER	150W		
	SURGE POWER	200W		
	WAVEFORM (TYPICAL)	True sine wave (THD<6%)		
	FREQUENCY	60Hz±0.3%	50Hz±0.3%	
	AC REGULATION	±5%		
	STANDARD RECEPTACLES	TYPE-2* 2ea	TYPE-3* 1ea	
INPUT	LED INDICATOR	Power and fault status		
	DC CURRENT	20A	10A	20A
	NO LOAD CURRENT DRAW	0.20A	0.16A	0.22A
	DC VOLTAGE	12V	24V	12V
	VOLTAGE RANGE	10.5 ~ 15VDC	21.0 ~ 30VDC	10.5 ~ 15VDC
	EFFICIENCY (Min.)	72%	79%	72%
	DC CONNECTOR	600mm Cigarette plug*1		
PROTECTION	FUSE	25A* 1	15A*1	25A*1
	BAT. LOW SHUTDOWN	10±0.5V	20±1V	10±0.5V
	OVERLOAD	>200W, shut down o/p voltage, re-power on to recover		
	OVER VOLTAGE	15 ~ 16V	30 ~ 32V	15 ~ 16V
	OVER TEMPERATURE	Yes, Shut down o/p voltage, recovers automatically after temperature goes down		
	OUTPUT SHORT	Shut-off o/p voltage, re-power on to recover		
ENVIRONMENT	BAT. POLARITY	By fuse open		
	WORKING TEMP.	0 ~ 40℃		
	WORKING HUMIDITY	20% ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-30 ~ +70℃ / -22 ~ +158°F, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50℃)		
SAFETY & EMC	SAFETY STANDARDS	UL458(Only for "GFCI" receptacles)		----
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25℃ / 70% RH		
	EMI CONDUCTION&RADIATION	Compliance to FCC class B		Compliance to EN55022 class B, 72/ 245/ CEE, 95/ 54/ CE
	EMS IMMUNITY	-----		Compliance to EN61000-4-2,3, ENV50204
	LVD	-----		Compliance to EN60950
OTHERS	DIMENSION	200*132*72mm (L*W*H)		
	PACKING	2.7kg ; 6pcs / 19kg / CARTON		
	COOLING	>40℃ (NT1) FAN ON		
	APPLICATIONS	Home appliance, Power tools, Office and Portable equipment, Vehicle and Yacht ...etc.		

AC Output Receptacles (optional)

					
TYPE-2	TYPE-3	TYPE-4	TYPE-5	TYPE-6	TYPE-7
USA	EUROPE	UNIVERSAL	AUSTRALIA	U.K	GFCI

■ Mechanical Specification

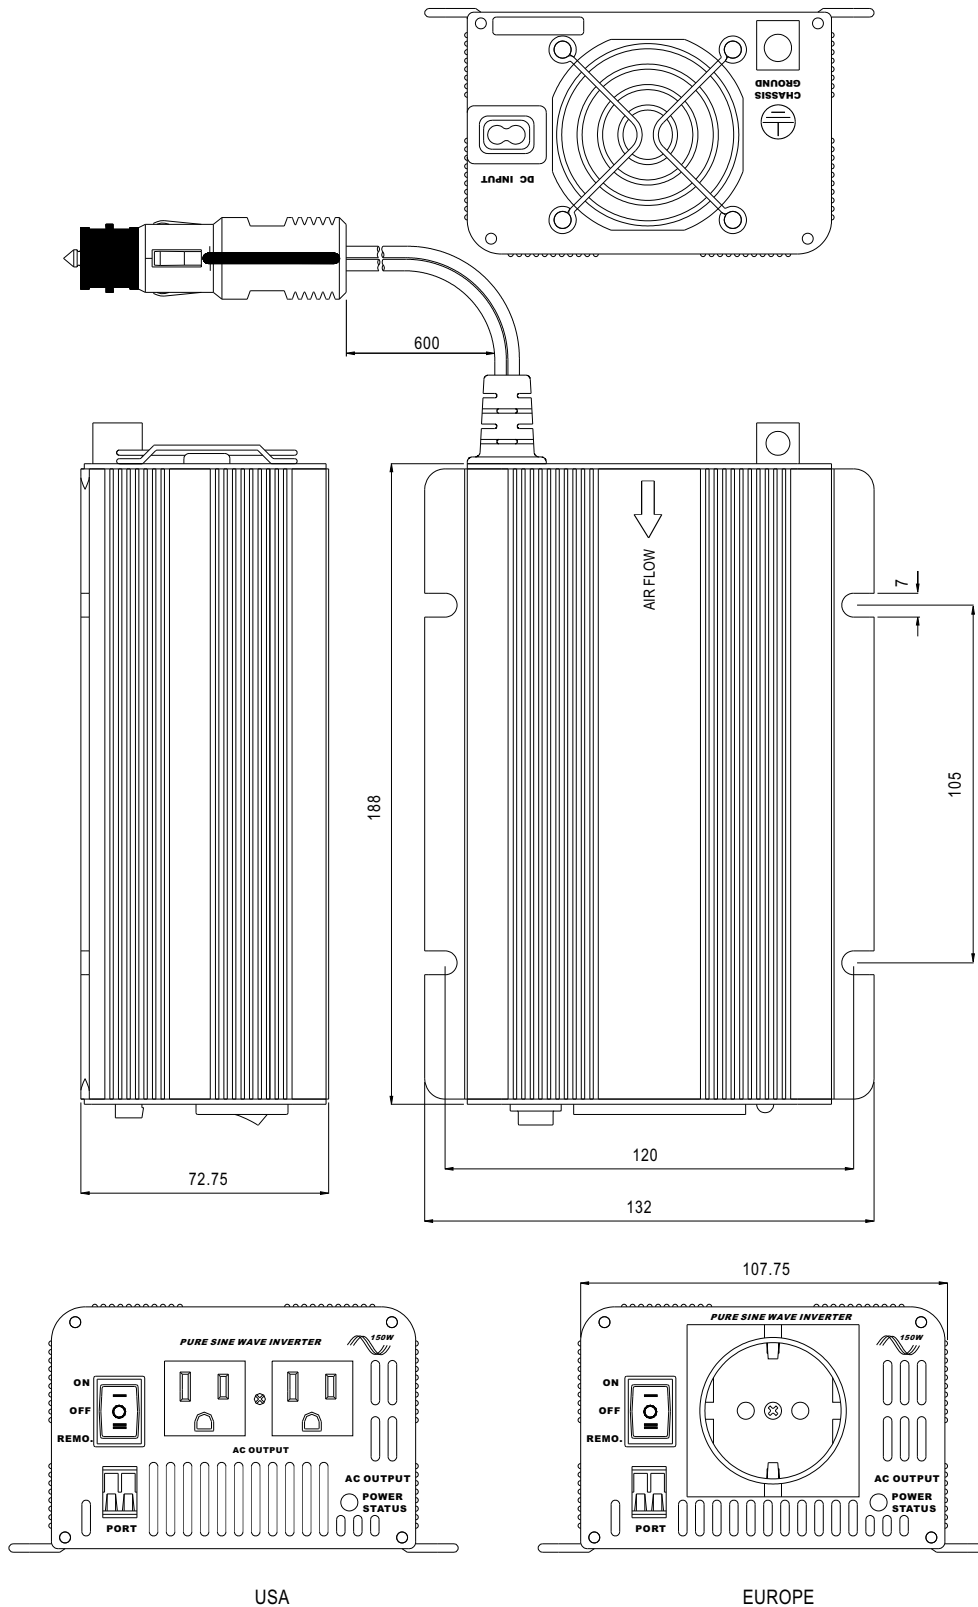Unit:mm



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

сайт: <http://meanwell.nt-rt.ru> | **эл. почта:** mlw@nt-rt.ru